

SHEERFILL V

Tensile Modulus - Poisson's Ratio




Two of the most important pieces of information needed in designing a tensile structures are the Tensile Modulus and Poisson's Ratio of the membrane material. There are various methods used to calculate these values. One of the most accepted was developed by the Membrane Structures Association of Japan (MSAJ). The membrane is subjected to biaxial stress at different loadings ratios (warp to fill). Results are then used to calculate the two values. In this bulletin, we have graphic information on the results of the biaxial tests and values for Tensile Modulus and Poisson's Ratio.

SHEERFILL V Architectural Membrane

Actual Value for Material Constants

Fabric	Tensile Modulus (kgf/m)		Poisson's Ratio	
	Warp	Fill	Warp	Fill
SHEERFILL V	172,000	106,600	0.76	0.47

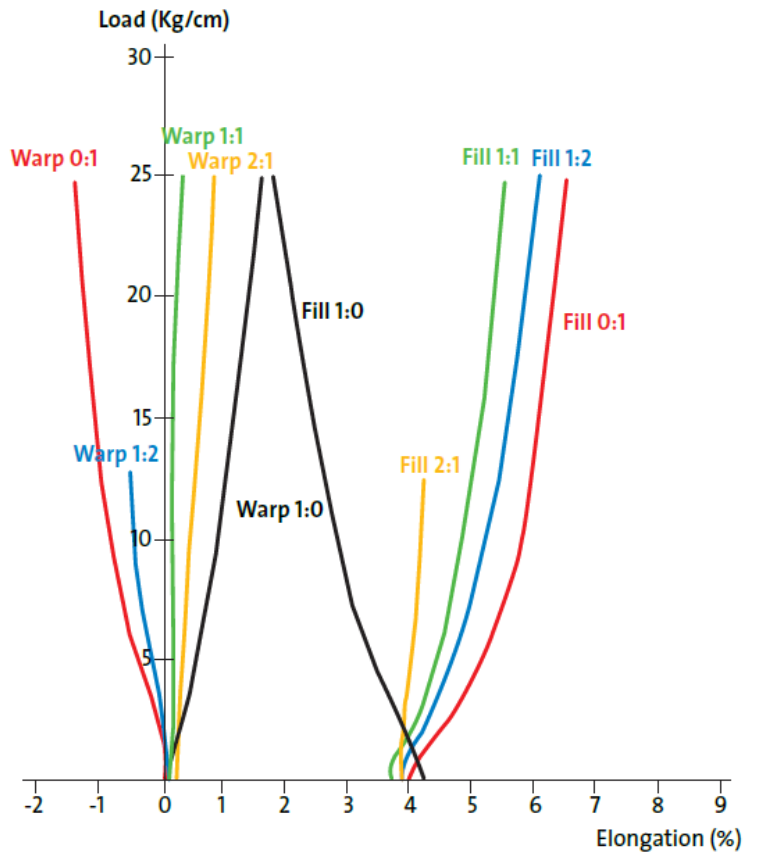

Saint-Gobain Performance Plastics

701 Daniel Webster Highway
 Merrimack, NH 03054
 Customer Service: +1 800 451 6101
 Telephone: +1 603 424 9000

sheerfill@saint-gobain.com

www.sheerfill.com



SHEERFILL® is a registered trademark of Saint-Gobain Performance Plastics Corporation

NOTE: Saint-Gobain Performance Plastics Corporation does not assume any responsibility or liability for any advice furnished by it, or for the performance or results of any installation or use of the product(s) or of any final product into which the product(s) may be incorporated by the purchaser and/or user. The purchaser and/or user should perform its own tests to determine the suitability and fitness of the product(s) for the particular purpose desired in any given situation.

©2018 Saint-Gobain Performance Plastics Corporation
 Valid 05/2018 • Supersedes all previous versions

